

SUMMUS



Lumileds
LED



≥ 60.000 hrs
at L80B10



L100/CLO
optional



PowerFactor
>0.9




CRI
> 80



Option: dim
(DALI)

ABOUT THE SUMMUS

The Summus is a flexibly configurable lighting line consisting of a base of pre-assembled lines and lighting units with ribbon cable. The lines can be fully occupied or equipped with blind sections as desired. The various coupling and suspension options make the Summus versatile. The Ocab Summus lighting line (with an IP rating of 44 and IK rating of 04) is a versatile lighting solution. If you need to modify the lighting line later due to changes in the layout of a space, this is easily achievable thanks to the flexibly configurable lighting line (based on pre-assembled lines and lighting units with ribbon cable). Easily add extra fixtures to the lines or relocate the current fixtures.

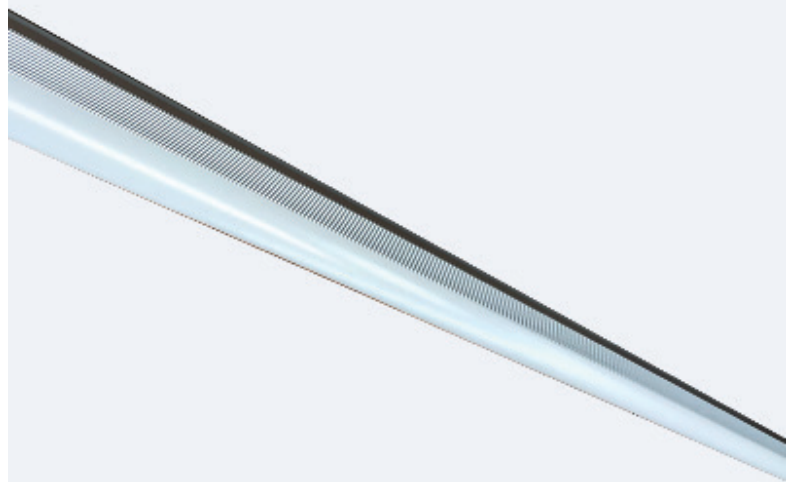


CE IP44 IP54 IK10
(Optional)

LIGHT BEAMS



120°

DIMENSIONS

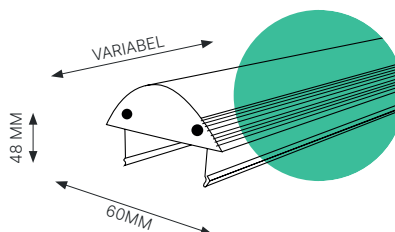

LED UNITS

CODE	LIFETIME HRS	COLOR CRI	TEMPERATURE KELVIN	LIGHT OUTPUT LUMEN	POWER WATT	EFFICACY LM/W
OCLLSU 1530 011K 830	≥60.000	>80	3.000 K	11.000 lm	65,8	167
OCLLSU 1530 011K 840	≥60.000	>80	4.000 K	11.000 lm	63,2	174
OCLLSU 1530 011K 857	≥60.000	>80	5.700 K	11.000 lm	61,1	179

BASE PROFILE

CODE	LENGTH
OCLLSU BP 4590	4.590 mm
OCLLSU BP 3060	3.060 mm
OCLLSU BP 1530	1.530 mm

BLIND SECTION

CODE	LENGTH
OCLLSU BD 1530	1.530 mm

SUSPENSION

CODE	DESCRIPTION
OCLLSU OS	Chain suspension bracket
OCLLSU OG	Suspension bracket with threaded rod
OCLLSU OK	Surface-mount suspension bracket

CONNECTION CAP

CODE	DESCRIPTION
OCLLSU AK	t.b.v. voeding lichtlijn


CONNECTING PIECES

CODE	DESCRIPTION
OCLLSU KS	Chain coupling bracket
OCLLSU KG	Threaded end
OCLLSU KK	Surface-mount

ACCESSORIES

CODE	DESCRIPTION
OCLLSU ED	Closed end cap
OCLLSU SH	Chain hook (S-hook)
OCLLSU DH	Sheet pile chain hook
OCLLSU BA	Concrete anchor
OCLLSU KB	Chain bundle 30 meters

COLORS



OPTICS

