

DOWN



Dimmable
optional



50.000
operating hours



Any RAL color
possible




PowerFactor
>0.9

ABOUT THE DOWN


The Down pendant directs light only downwards. The suspension wire attachment is located at the top of the profile. The pendant is also available in the Up & Down variant.

The pendant is available as standard in a round or linear type. Other shapes are also possible upon request. Choose the desired color temperature (Kelvin) with Tunable White and adjust the light intensity according to the needs of the moment.

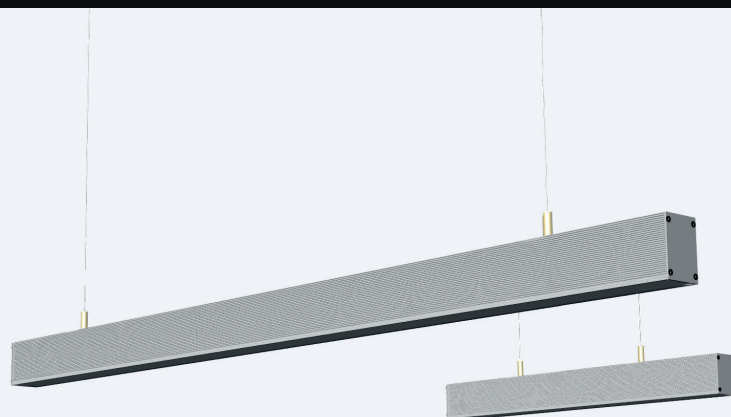

CE IP20 IK04

DIMENSIONS

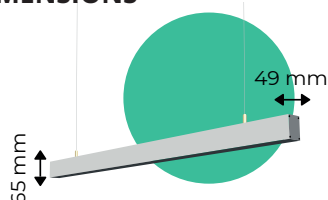

AVAILABLE VERSIONS

CODE	COLOR	WATT	LM/W	LUMEN DOWN	CRI (RA)	KELVIN	LENGTH MM
IF.PE.DL.1200.041.830	830	49.6	169	4.175	>80	3000	1200
IF.PE.DL.1200.043.840	840	49.6	178	4.399	>80	4000	1200
IF.PE.DL.1200.044.850	850	49.6	179	4.440	>80	5000	1200
IF.PE.DL.1200.041.930	930	62.2	134	4.178	>90	3000	1200
IF.PE.DL.1200.043.940	940	62.2	141	4.399	>90	4000	1200

The above is an example configuration of 1200 mm. The profile can be applied in any length as desired. The maximum lumen level is specified. Lower levels are always possible.

